


V-Twin Mfg.
PUSHROD RETAINER REMOVER/INSTALLATION TOOL
Used with all HD Engines using Pushrod Covers with clip in retainers.
VT No. 16-1024

This tool should only be used by a knowledgeable and trained motorcycle technician. V-Twin Mfg. Accepts no responsibility for improper use.


Instructions:



To remove Retainer Clip.
1. Insert the pin of the tool into the retainer clip as shown. Rotate the tool towards the cylinder. The retainer will pop out.

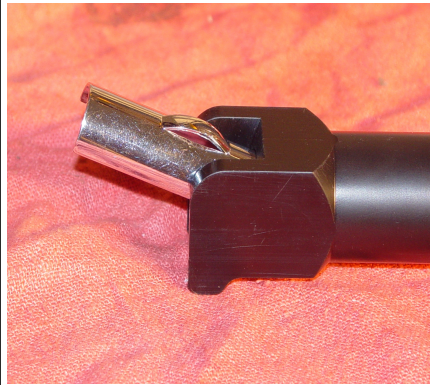

To install Retainer Clip.
1. Place the retainer Clip into the tool as shown.

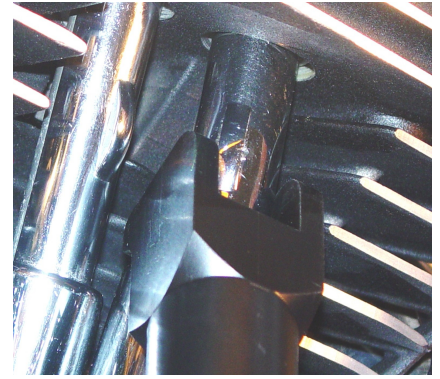

2. Slip the retainer Clip into the top groove and place the tool on top of the spring cover as shown. Pivot the tool upward.