

V-Twin Mfg.
Chrome Adjustable Display Stand
Fits 2008 – Later ST Models (except FXCW & FXCWC)
VT No. 16-1522

This is a custom application rider safety depends on proper installation. This product should only be installed by a knowledgeable and trained motorcycle technician. V-Twin Mfg. accepts no responsibility for improper installation.

Installation Instructions:

1. Remove the plastic hole plugs at the left lower rear of the frame.
2. Refer to the service manual and remove the exhaust bracket mounting bolts and spacer.
3. Position the Display Stand over the mounting holes with the skid plate facing forward. The Display Stand plate fits between the frame and exhaust bracket.
4. Install the supplied bolts using loctite. Use the long bolts on the exhaust bracket side.
5. Make certain the Display Stand does not make contact with other components such as the exhaust system, foot pegs or foot or foot boards.
6. Tighten bolts the 30-35 Ft -lbs.

Adjusting the Stand:

1. When adjusting the stand make certain the flange side of the foot is facing rearward. See Photo B.
2. A minimum of $\frac{3}{4}$ inch thread must be engaged into the stand.
3. Adjust the feet to properly support the motorcycle level. The feet may be adjusted to raise the back tire slightly off the ground if desired.
4. Lock the jam nuts.

WARNING: When using the Display Stand **DO NOT** park the motorcycle pointing downhill. The motorcycle may roll off the stand causing serious injury or damage.

WARNING: DO NOT START the motorcycle when using the stand.



Photo A

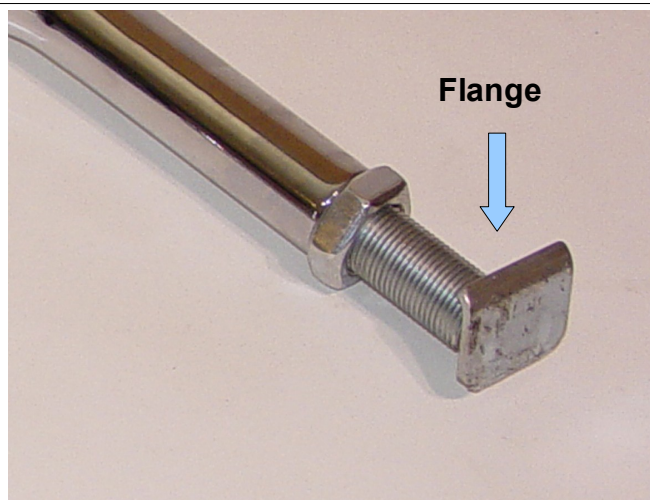


Photo B