

VT No. 27-0522

Kickstand Extension Kit for Sportster

General


This Kit is designed for installation on all 1984-1991 XLs; and 1992 and later 883 STD/883DLX/1200/1200S (does not fit 1992 and later 883 Hugger or XL 1200C models).

Kit contents:

QTY	DESCRIPTION
1	Screw
1	Extension
1	Locknut
1	Rubber pad

Installation

1. Block motorcycle under frame so that motorcycle is securely upright (not leaning to either side), and so that stand may be moved, without restriction, through its normal range of travel.
2. See Figure 1. Insert nipple end of rubber pad (1) (from kit) into hole in end of stand extension (2) from kit. Pull on end of nipple to properly seat the pad to the extension. Cut off rubber "pull end" at tip of nipple.
3. Move stand (3) to its retracted position. Place extension (2) onto upper flat section of stand, positioning it a 1/2 inch away from the "blend line" (4) in flat section of stand (as shown in figure 1). Mark the position of extension mounting hole onto stand. Remove extension from stand.
4. With stand in its extended position and with underside of stand flat section supported by a wood block(s), use a center punch to indent stand at center position marked in step 3. This will help to prevent drill bit from wandering off center during the following procedure. Drill a starter hole, at the center punch indentation, through stand using a 1/16 - 1/8 inch twist drill bit at a slow drill speed (use of a cutting oil is also recommended). Drill the finished hole using a 1/4 inch twist drill bit at a slow drill speed.
5. Position the extension on stand and secure with screw (5) and locknut (6) from kit. Tighten fasteners to 8ft-lbs.
6. Check stand and extension for unrestricted movement through their normal range of travel.

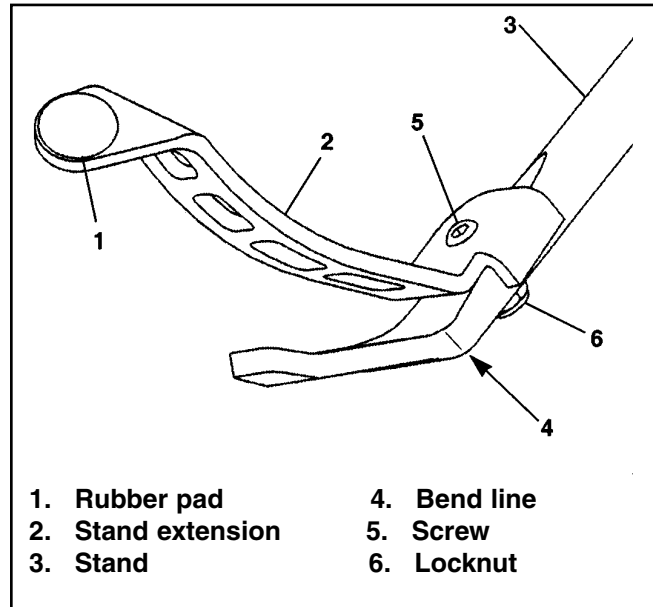

7. Place stand in its extended position. Carefully remove support blocking from beneath motorcycle frame.

Warning. The stand chrome extension is intended only to improve the rider's access to the stand. It is not intended to be used as an indicator of the stand position at any particular time. Always check the stand itself to verify that the stand is either fully extended (in forward lock position) for parking or fully retracted during motorcycle operation. Read and understand the regarding jiffy stand operation in your Owner's Manual.

Caution: Do not step on the stand extension or it may be damaged.

This product should only be installed by a knowledgeable and trained motorcycle technician. V-Twin Mfg. accepts no responsibility for improper installation.