

VT NO. 33-0808

7-INCH HEADLAMP TRIM RING

Kit Contents

See Table 1 and Figure 1.

Table 1. Kit Contents

Item	Description	
1	Screw	
2	Nut	
3	Trim ring	

INSTALLATION

1. Loosen original equipment trim ring screw.

NOTE

If the original equipment trim ring screw is not loosened, the accessory trim ring will not fit properly.

2. Slip new trim ring over original equipment trim ring. The partial lip on the back of the accessory ring should slip between headlamp housing and original equipment trim ring.

NOTE

See Figure 1. If necessary, remove screw and nut to allow trim ring to slip over original equipment trim ring. Position mounting screw of accessory trim ring at bottom of headlamp.

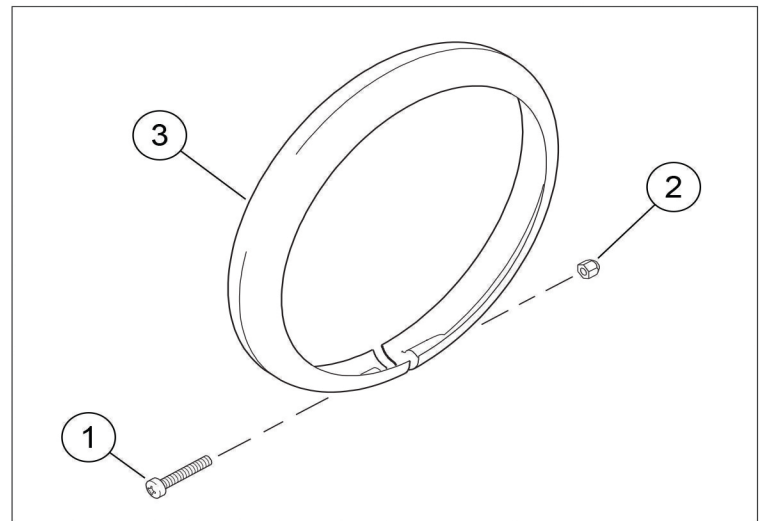


Figure 1. Headlamp Trim Ring

3. Tighten original equipment ring screw.
4. Tighten accessory trim ring screw.