
## **License Plate Bracket**

VT No. Finish 31-1472 Chrome

31-1473 Black

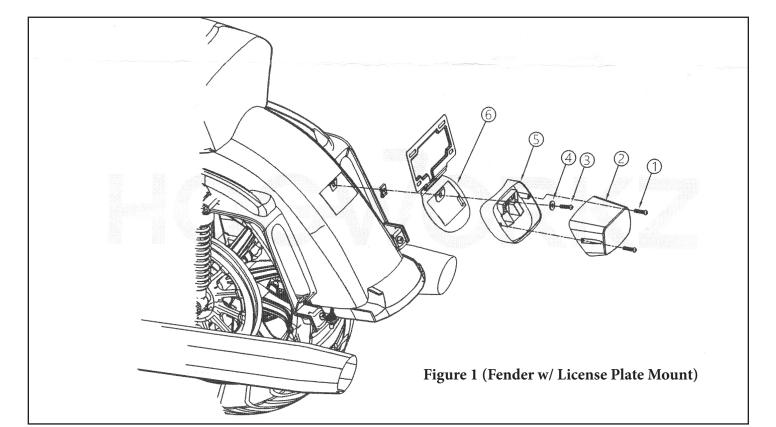

- 1. Remove tail lamp base (5) and lens (2), screws (1, 3) and washer (4).
- 2. Place license plate mount (6) then install tail lamp base (5) and secure with screw (3) and washer (4).
- 3. Reconnect tail light lens (2) then secure with two remaining screws (1).
- 4. Affix license plate to plate mount and adjust to desired angle.

Part#	Description	Qty
1	Tail Lamp Screw	2
2	Tail Lamp Lens	1
3	Base Screw	1
4	Base Washer	1
5	Tail Lamp Base	1
6	License Plate Mount	1

Warning: Apply blue thread locker to screws to finish installation.