

## XL Oil Tank Bezel

### Kit Contents

This kit consists of a new oil tank bezel, a push nut and these instructions. The push nut is also available separately.

VT No. 40-0012 Chrome

VT No. 40-0013 Black

### REMOVAL

1. See Figure 1. Remove filler cap/dipstick (1) from oil tank (2) on right side of vehicle.
  - a. Press straight down on filler cap/dipstick, then release. Cap pops up.
  - b. Pull up on filler cap/dipstick while turning counterclockwise one-quarter turn to unscrew cap. Remove filler cap/dipstick.
2. Remove right hand side cover (3) by gently prying bottom lip of cover off tab on oil tank. Lift cover up slightly so mounting holes (7) on top of cover clear mounting posts (8) on oil tank. Remove cover.
3. To remove bezel (4), remove the push nut (6). Press outward on the locating pin (5) on the inside of the bezel until the bezel separates from the side cover. Discard the push nut.


### INSTALLATION

1. See Figure 1. Press the new gloss black bezel (4) into position on the side cover (3), aligning the locating pin (5) with the small hole.
2. Secure the bezel with the new push nut (6) from the kit.
3. Place top of side cover onto right side of oil tank (2) so that mounting holes (7) in top of cover fit onto mounting posts (8) on oil tank.
4. Press bottom of side cover in place on oil tank so that slot in bottom of cover snaps onto mounting tab on oil tank.

### NOTE


See Figure 2. Note that filler cap/dipstick has a wide slot (1) and a narrow slot (2) and can only be inserted in oil tank one way.

5. See Figure 1. Insert filler cap/dipstick (1) into oil tank (2). Press down on filler cap while turning clockwise one-quarter turn to screw filler cap into oil tank. When cap stops turning, it is fully seated. Press down on cap until it snaps into place, flush with top of right hand side cover (3).

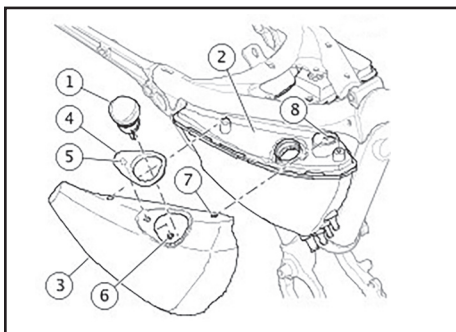

- 1 Filler cap/dipstick
- 2 Oil tank
- 3 Right hand side cover
- 4 Bezel (Not available separately)
- 5 Bezel locating pin
- 6 Push nut (Part No. 8135B)
- 7 Side cover locating hole (2)
- 8 Side cover locating pin (2)

Figure 1. Right Hand Side Cover Installation

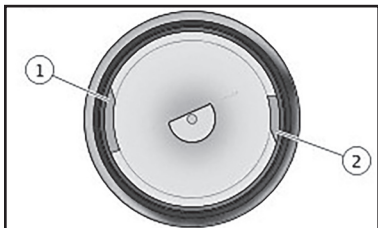

- 1 Wide slot
- 2 Narrow slot

Figure 2. Filler Cap/Dipstick