AWARNING

The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. Improper installation of this kit could result in death or serious injury.

NOTE

This instruction sheet references service manual information. A service manual for your model motorcycle is required for this installation.

See Figure 2 and Table 1.

REMOVAL

- Remove stock seat and grab strap following the instructions in the service manual.
- 2. Remove fender trim strips (if equipped):
 - a. Cover the tip of a regular screwdriver with a piece of tape to protect chrome and painted surfaces.
 - b. See Figure 1. Insert the tip of the screwdriver between the chrome bezel and the rubber trim strip.
 - c. Pry up the bezel enough to get a hold of it, then pull it up and away from the rubber trim strip.
 - Starting at either end, peel the rubber trim strip away from the fender.
 - e. Clean any remaining adhesive off of the fender using an approximately 1:1 solution of distilled water and isopropyl alcohol.

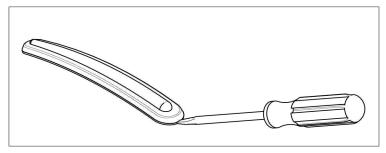


Figure 1. Remove Fender Trim Strip

INSTALLATION

47-0005:

- 1. Install grab strap end into grab strap bracket slot. Align the grab strap hole with the bracket hole.
- Install grab strap screw and washer . Tighten to 4- 6 ftlbs (5.4-8.1 Nm).

47-0006

1. Install the grab strap (4) with the seat mounting studs through the inner grab strap holes.

For All Models

- Refer to solo seat instruction sheet for installation of rider seat and backrest.
- 2. Install the mounting nuts.
- 3. Tighten nuts snugly.
- 4. Slide slots on leading edge of passenger pillion (1) onto seat mounting nuts while sliding the pillion through the grab strap.
- 5. Install mounting screw from stock seat through the mounting tab and tighten to 36-60 **in-lbs** (4-7 Nm).

AWARNING

After installing seat, pull upward on seat to be sure it is locked in position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury.

6. Pull on seat and pillion to verify they are securely installed.