

# INSTRUCTION



VT No. 39-0540

## CAUTION

1. Read all instructions before use.
2. For use of vehicle with an electrical speed sensor.
3. This product is NOT water-proof, but water-resistant. Internal condensation may be found due to a sudden and rapid change of ambient temperature.
4. Be sure that VELONA gauges display the right speed before use on public road.
5. Disconnect the ground wire from the negative post of vehicle's battery before installation.
6. Designed for a 12 volt system. VELONA does NOT work with a 6 volt system or a battery-less system.
7. Use VELONA gauges for the intended purpose of use.
8. DO NOT disassemble VELONA. It may be damaged and water may come in.
9. DO NOT leave VELONA under the sunlight when not used.
10. Avoid contact with gasoline, brake fluid or other chemicals. It may be damaged.
11. DO NOT hit, drop or give a shock on VELONA. It may be damaged due to a precision part.
12. Rubber mounting is recommended for vehicles with much vibration.
13. After installation, check to see if all the parts are correctly installed, and see if all the screws are properly.


14 Periodical inspection of the installed parts is required every 500km(300mile). If anything unusual may be found while driving, stop at a safe place to check.

## FEATURES


- Stepping motor-driven speedometer
- Speed unit(km/h or MPH) is selectable on some VELONA gauges
- Odometer (Not Resettable), Range : 0.0-99999.9 km/mile
- Trip Odometer 1 (Resettable), Range : 0.0-99999.9 km/mile
- Trip Odometer 2 (Resettable), Range : 0.0-99999.9 km/mile
- Clock, AM/PM Display Only
- Voltmeter, Range : 0-18.0V

## Installation and Components


The Red wire is to be connected to the wire that gives current when the main switch is turned on.  
The White wire is to be connected to the wire from the speed sensor.

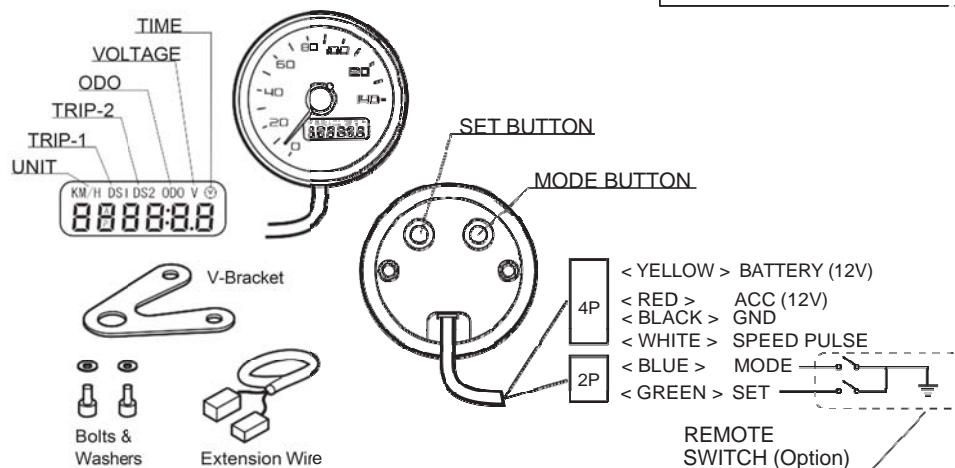


## Operation

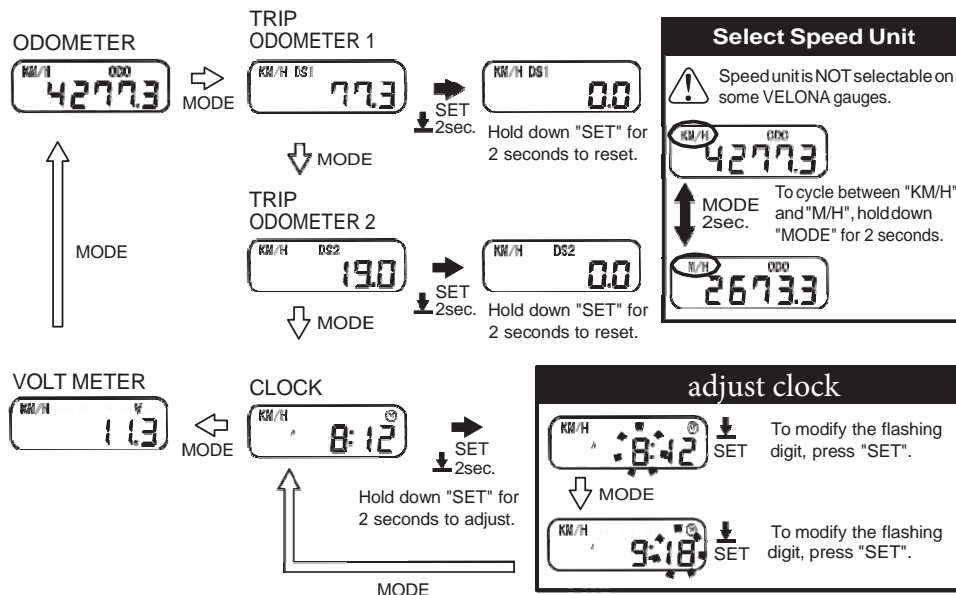

## speed calibration



## Auto Calibration Mode

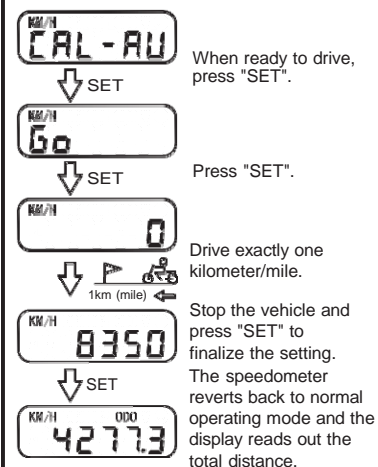

## Speed Adjust Mode

