



## VT No. 40-1468

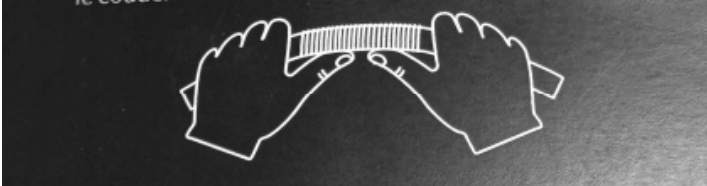

### Step 1

Slide the coil where bend is required. Position spine on the inside of the intended bend.

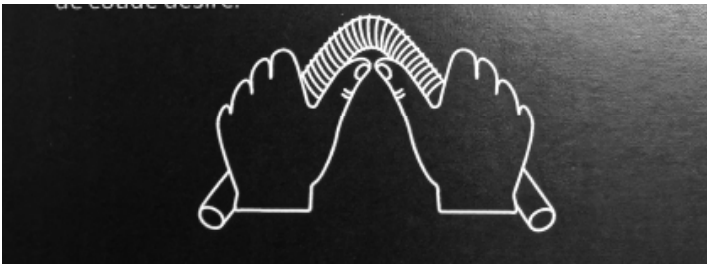

### Step 2

Press spine until required bend is achieved.



### Note:

Gradual bend in spine will achieve best results.

Maximum bending angle 90°